

# WIRELESS SECURITY SYSTEM

# TRANSMITTER SERIES

A wide variety of transmitters for various security plans, like security, disaster prevention, and protection.

### For emergency notification

- Emergency calls in case of burglary, or acute disease



### For theft prevention

- Prevention of car break-ins or bicycle theft
- Theft prevention of valuables and cash



You can select the most suitable transmitter according to the application and location.

### For fire prevention

- Accidental or suspicious fire detection



### For intrusion prevention

- Glass breakage or room intrusion detection




### For protection from suspicious individuals

- Alerts around the perimeter of buildings



## ■CARD TYPE/PUSH BUTTON TRANSMITTER TX-101A TX-101P

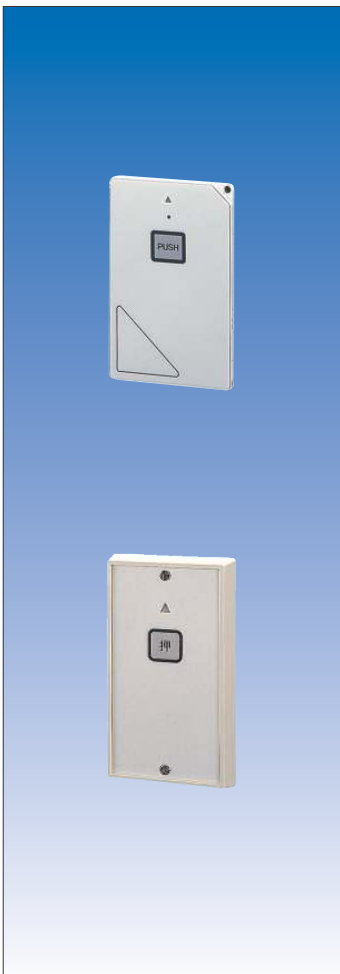

### Card type transmitter TX-101A


- Compact, card type mobile transmitter with a thinness of 6mm
- Two transmission modes are available: one-shot transmission which transmits the radio wave once every push of the button, and continuous transmission which continues transmission until reset.
- The battery normally lasts around 2 years when transmitting once a day.
- Utilizes a coin type lithium battery for simple replacement.
- Monitors the radio wave arrival status using the regular transmission function.
- Transmits the battery exhaustion signal to the receiver and the body indicator blinks when the battery voltage drops below a certain level.
- Mounted on the wall easily using the optional wall mount holder.

### Push button transmitter TX-101P


- Splash-proof construction usable in semi-indoor areas, this unit can be installed at an entrance and used as a chime to notify the arrival of guests.
- One-shot transmission which transmits the radio wave once every push of the button
- The transmission function is the same as that of TX-101A.

### ■EXTERNAL DIMENSIONS (UNIT: mm)

#### <TX-101A>

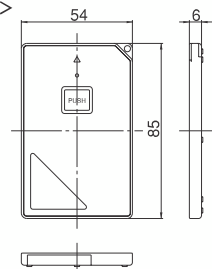

#### <TX-101P>

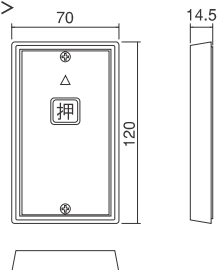

### ■OPTIONAL ACCESSORIES



- Wall mount holder for TX-101 <BH-101>



- Pendant type holder <BPH-101>

### ■SPECIFICATIONS

Model No.	TX-101A	TX-101P
Voltage	3V DC (coin-type lithium battery: CR-2032 included)	
Battery life	Approx. 2 years (1 transmission per day) *The battery life is only for reference for the operation at normal temperature, which is not guaranteed.	
Operating frequency band (output)	426MHz band (3mW max.)	
Radio wave arrival distance	Approx. 100m (line-of-sight distance)	
Included functions	Battery exhaustion function/ Regular transmission function	
	Transmission mode changeover function	One-shot transmission
Mounting position	Indoor	Indoor/semi-outdoor (Drip-proof structure)
Ambient temperature range	-10°C to +50°C	
Weight	Approx. 35g (including battery)	Approx. 118g (including battery)
Appearance	ABS resin (white)	