


WIRELESS SECURITY SYSTEM

WATCH TYPE TRANSMITTER TX-111-S (G) TX-111 (B) TX-111-S (BL)



- A portable transmitter, with the transmission function incorporated in an analog watch.
- One-shot transmission available with a simple light push of the button.
- 10 air pressure waterproof, available to use in bathroom or pool while attached.
- The battery normally lasts around 3 years when transmitting once a day.
- Monitors the radio wave arrival status using the regular transmission function.
- Transmits the battery exhaustion signal to the receiver and the body indicator blinks when the battery voltage drops below a certain level.
- Belt: 3 colors (Gray, Brown, Black)

EXTERNAL DIMENSIONS (UNIT: mm)

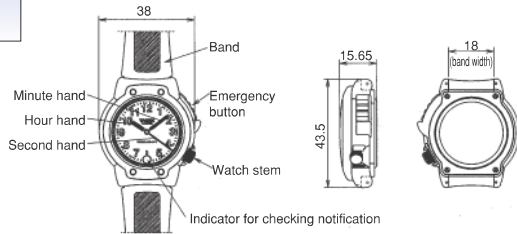


SPECIFICATIONS

Model No.	TX-111-S (G)	TX-111 (B)	TX-111-S (BL)
Voltage	3V DC coin-type lithium battery (CR2025) included		
Battery life	Approx. 3 years (1 transmission per day, at normal temperature) *The battery life is only for reference for the operation at normal temperature, which is not guaranteed.		
Operating frequency band (output)	426MHz band (3mW max.)		
Radio wave arrival distance	Approx. 100m (line-of-sight distance)		
Included functions	Analog watch, 10 air-pressure waterproof structure, Battery exhaustion alarm function, Regular transmission function		
Ambient temperature range	-5°C to +55°C		
Time display	Analog: 3 hands (hour, minute, second)		
Weight	Approx. 41g		
Appearance	ABS resin (gray)	ABS resin (black)	ABS resin (brown)

OPTIONAL ACCESSORIES

- Battery replacement kit




WATCH TYPE TRANSMITTER TX-111C-S (G) TX-111C-S (BL)



- Continuous transmission type of TX-111.
- Transmission continues until reset, suitable for emergency calls.
- Belt: 2 colors (Gray, Black)

EXTERNAL DIMENSIONS (UNIT: mm)

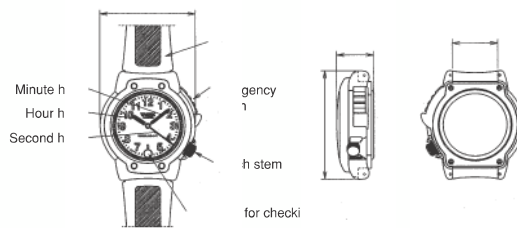

SPECIFICATIONS

Model No.	TX-111C-S(G)	TX-111C-S(BL)
Voltage	3V DC coin-type lithium battery (CR2025) included	
Battery life	Approx. 3 year (standby) Approx. 1 hour for continuous transmission (with a new battery) *The battery life is only for reference for the operation at normal temperature, which is not guaranteed.	
Operating frequency band (output)	426MHz band (3mW max.)	
Radio wave arrival distance	Approx. 100m (line-of-sight distance)	
Included functions	Analog watch, 10 air-pressure waterproof structure, Battery exhaustion alarm function, Regular transmission function	
Ambient temperature range	-5°C to +55°C	
Time display	Analog: 3 hands (hour, minute, second)	
Weight	Approx. 48g	
Appearance	ABS resin (gray)	ABS resin (black)

OPTIONAL ACCESSORIES

- Battery replacement kit

